


GRX-CBL-346S Cable

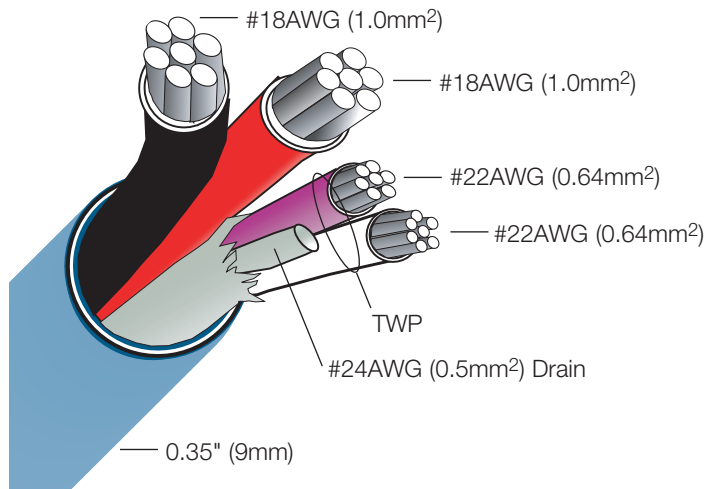


Description

- Non-plenum rated cable for use with GRAFIK Eye 3000, GRAFIK Integrale, and HomeWorks Interactive Systems.

Specifications

- Listed as cable type CL3.
- Available in 500 ft. (150m) spool.
- Five conductors:
 - Common – #18AWG (1.0mm²)
 - Power – #18AWG (1.0mm²)
 - MUX Data – #22AWG (0.64mm²)
 - MUX Data – #22AWG (0.64mm²) } Twisted Wire Pair
 - Drain Wire – #24AWG (0.5mm²)
- Total Outer Jacket Diameter: 0.35" (9mm).
- 300V Rated.
- PVC Sheath, 75°C rated.
- UL/CSA Listed.
- Rated FT1.

GRX-CBL-46L Cable

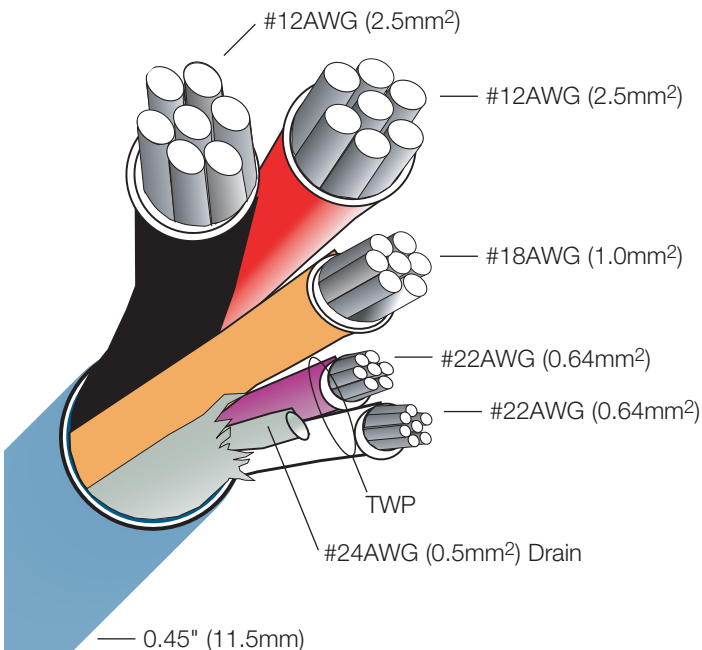

Description

- Non-plenum rated cable for use with GRAFIK Eye 4000, GRAFIK 5000/6000/7000, Digital microWATT, Softswitch128, Softswitch512, and GRAFIK RPT Systems.

Specifications

- Listed as cable type CL3.
- Available in 250 ft. (75m) or 500 ft. (150m) spools.
- Six conductors:
 - Common – #12AWG (2.5mm²)
 - Power – #12AWG (2.5mm²)
 - MUX Data – #22AWG (0.64mm²)
 - MUX Data – #22AWG (0.64mm²) } Twisted Wire Pair
 - Sense Line – #18AWG (1.0mm²)
 - Drain Wire – #24AWG (0.5mm²)
- Total Outer Jacket Diameter: 0.45" (11.5mm).
- 300V Rated.
- PVC Sheath, 75°C rated.
- UL/CSA Listed.
- Rated FT1.

Job Name:

Model Numbers:

Job Number: