

## DATA SHEET

# RCP07X

## 7 BUTTON RF WALL PLATE CONTROLLER



### WHAT IS IT ?

A wireless 7 button wall mounted control panel providing 4 scenes plus off and master raise and lower.

The unit provides full scene programming.

Externally powered via a 12V DC power supply rather than the Lithium coin cells used in the RCP07 wall plate controller.

The RCP07X wireless push button wall plate controller with 4 scenes, off and master raise and lower buttons



### WIRE-FREE CONTROL

The RCP07 push button wall plate controllers are designed to be mounted anywhere, be it flush mounting to UK back-boxes or simply surface mounted to any flat surface using the patress provided.

RAKOM coded radio transmission eliminates the need for any data cabling to dimmer receiver modules. Cabling is limited to just a 12V DC power supply, ensuring that the system can be installed with minimum fuss and disruption.

Flat metal cover plate accessory kits are available in a variety of standard finishes including: brushed stainless steel, mirrored stainless steel and polished brass.

Versions Available:

RCP07WX - White finish, externaly powered

RCP07CX - Charcoal finish, externaly powered

## DATA SHEET



# RCP07X

## 7 BUTTON RF WALL PLATE CONTROLLER

### TECHNICAL DATA

<b>DIMENSIONS</b>	86x86x14mm - flush mount 92x92x14mm - surface mount
<b>FIXING</b>	Flush mounting into standard UK single gang back box, minimum 12mm deep Surface mounting on standard single gang UK or European back box or direct to flat surface
<b>INPUT SUPPLY</b>	12V DC power supply (RAPSU or equiv.)
<b>WEIGHT</b>	100g
<b>CLIMATE RANGE</b>	Temperature +2C to +40C Humidity +5% to 90% non condensing
<b>STANDARDS</b>	EMC - EN 5001-1 :1992 Immunity - EN 50082-1 :1997
<b>COMMUNICATION</b>	Rakom coded fm radio, 433.9MHz
<b>MEMORY</b>	Flash memory (non volatile)

### MECHANICAL DATA

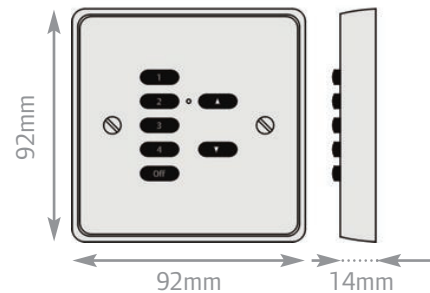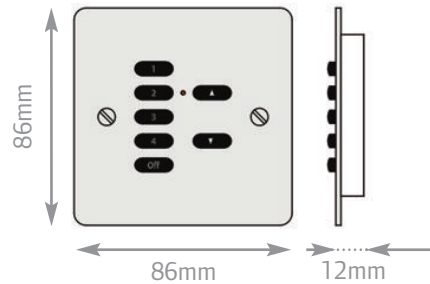

### CONNECTION DETAILS

